


# mountain chill


MT670-2

**WATER CHILLER**


**INSTALLATION SHEET**

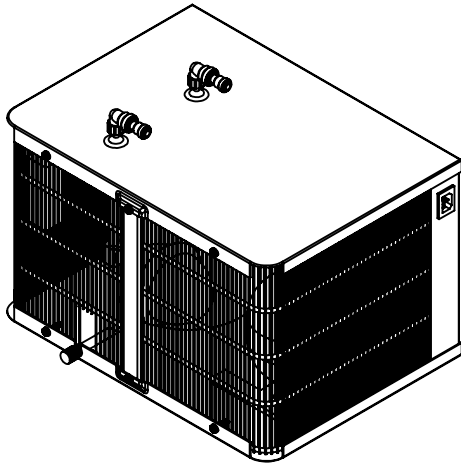


**Water Chiller Unit  
With Power Cord**



**1/4" or 3/8" Tube  
Push-In Fittings  
(Attached to Chiller)  
(2x)**

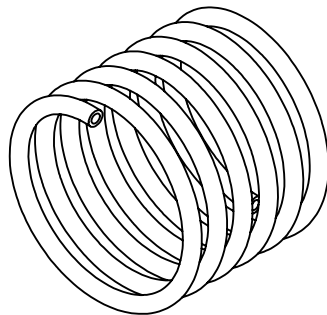

**Poly 3/8" Inch LLDPE  
Tubing**

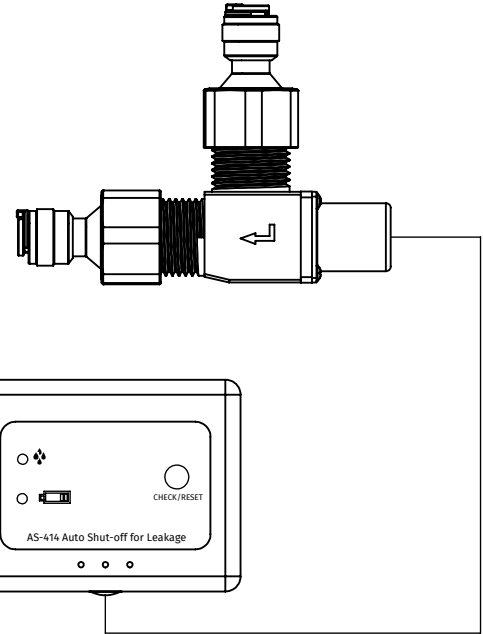

**Leak Detector With  
3/8" Adapters**

#### **WARRANTY**

FOR WARRANTY INFO PLEASE VISIT [WWW.MOUNTAINPLUMBING.COM/PAGE/RESOURCES/WARRANTY](http://WWW.MOUNTAINPLUMBING.COM/PAGE/RESOURCES/WARRANTY)

#### **FINISH CARE & MAINTENANCE**

NEVER USE ANY HARSH ALKALI, ACID BASED DETERGENTS OR CLEANERS SUCH AS SOFT SCRUB®, SCRUBBING BUBBLES® OR COMET® TO CLEAN. DO NOT USE BRILLO® OR SCOTCH BRITE® PADS. THESE WILL ALL HARM THE FINISH. TO CLEAN, USE ONLY A DAMP SOFT CLOTH AND WIPE GENTLY. STANDARD WINDEX® CAN ALSO BE USED SPARINGLY. IT IS NOT NECESSARY TO WIPE HARD TO REMOVE SPOTS. TO MAINTAIN THE FINISH, WIPE WITH A SOFT DRY CLOTH AFTER USE. AN OCCASIONAL COAT OF PURE CARNAUBA WAX WITHOUT CLEANERS WILL HELP PROTECT THE FINISH.

# mountain chill

## MT670-2

## WATER CHILLER


## INSTALLATION SHEET



A McAlpine Company

# Mountain

Plumbing Products

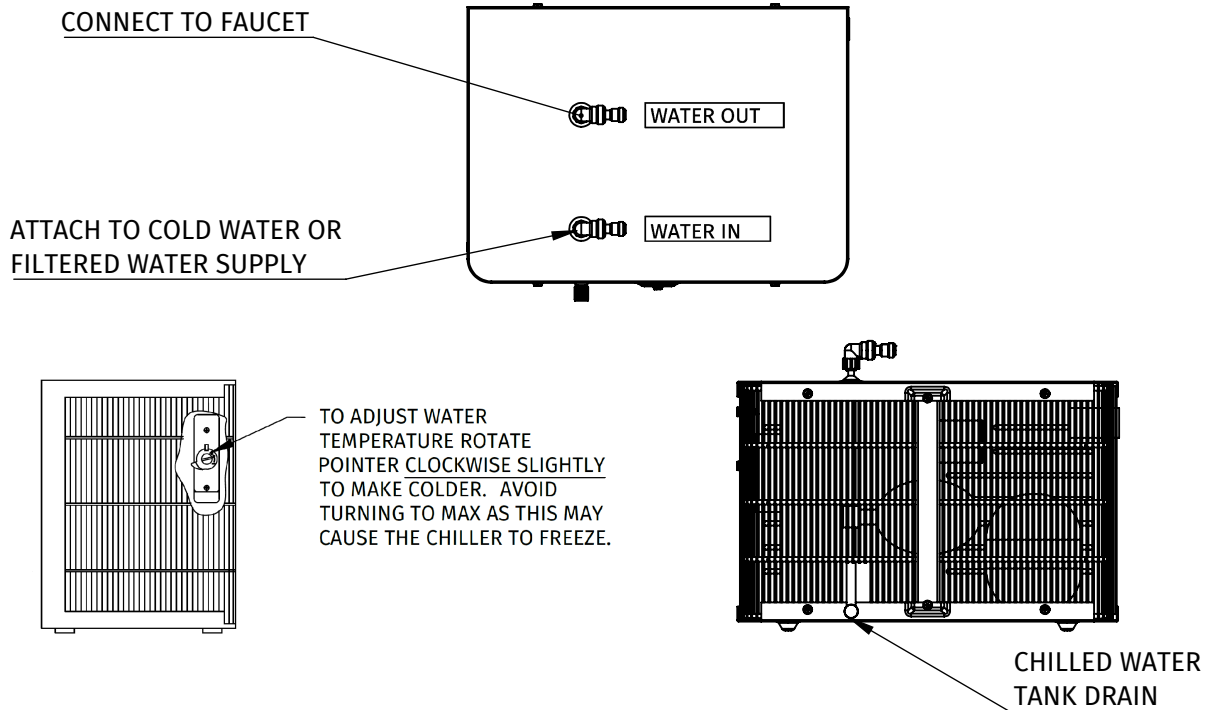

1. DO NOT INSTALL THE CHILLER OUTDOORS OR IN A LOCATION WHERE THE TEMPERATURE MAY FALL BELOW 32° F
2. WHEN INSTALLING CHILLER IN A CABINET, MAKE SURE THERE IS A VENT FOR AIR CIRCULATION OR AN OPENING IN CABINET BACK.
3. KEEP CHILLER AT LEAST 2 INCHES AWAY FROM CABINET WALL.
4. AFTER ALL CONNECTIONS ARE COMPLETE, OPEN FAUCET TO FLUSH CHILLER, TANK, TUBING & FILTER (IF USED). CHECK FOR LEAKS.
5. PLUG IN CHILLER AND ALLOW TO RUN UNTIL IT STOPS (APPROXIMATELY 7 TO 12 MINUTES).
6. WATER IS NOW CHILLED AND READY FOR DRINKING.


MT670-2 CHILLER SPECIFICATIONS	
POWER RATING	115VAC 60HZ, 220VAC 50HZ
POWER USAGE	75W (0.2 kw.hr/24hr), 1.2A
COMPRESSOR	SINGLE PHASE
REFRIGERANT	R134A, 1.2oz CHARGE
OUTPUT TEMP RANGE	39.2° F to 50° F
TANK CAPACITY	0.5 GALLONS
OUTPUT CAPACITY	3 GALLONS/HR
DIMENSIONS	10 1/8" HI, 11 3/4" DP, 16" WIDE
CERTIFICATIONS	C-UL-US, CE, CB
WARRANTY	THREE YEARS ON COMPRESSOR

# mountain chill

## MT670-2

## WATER CHILLER

## INSTALLATION SHEET

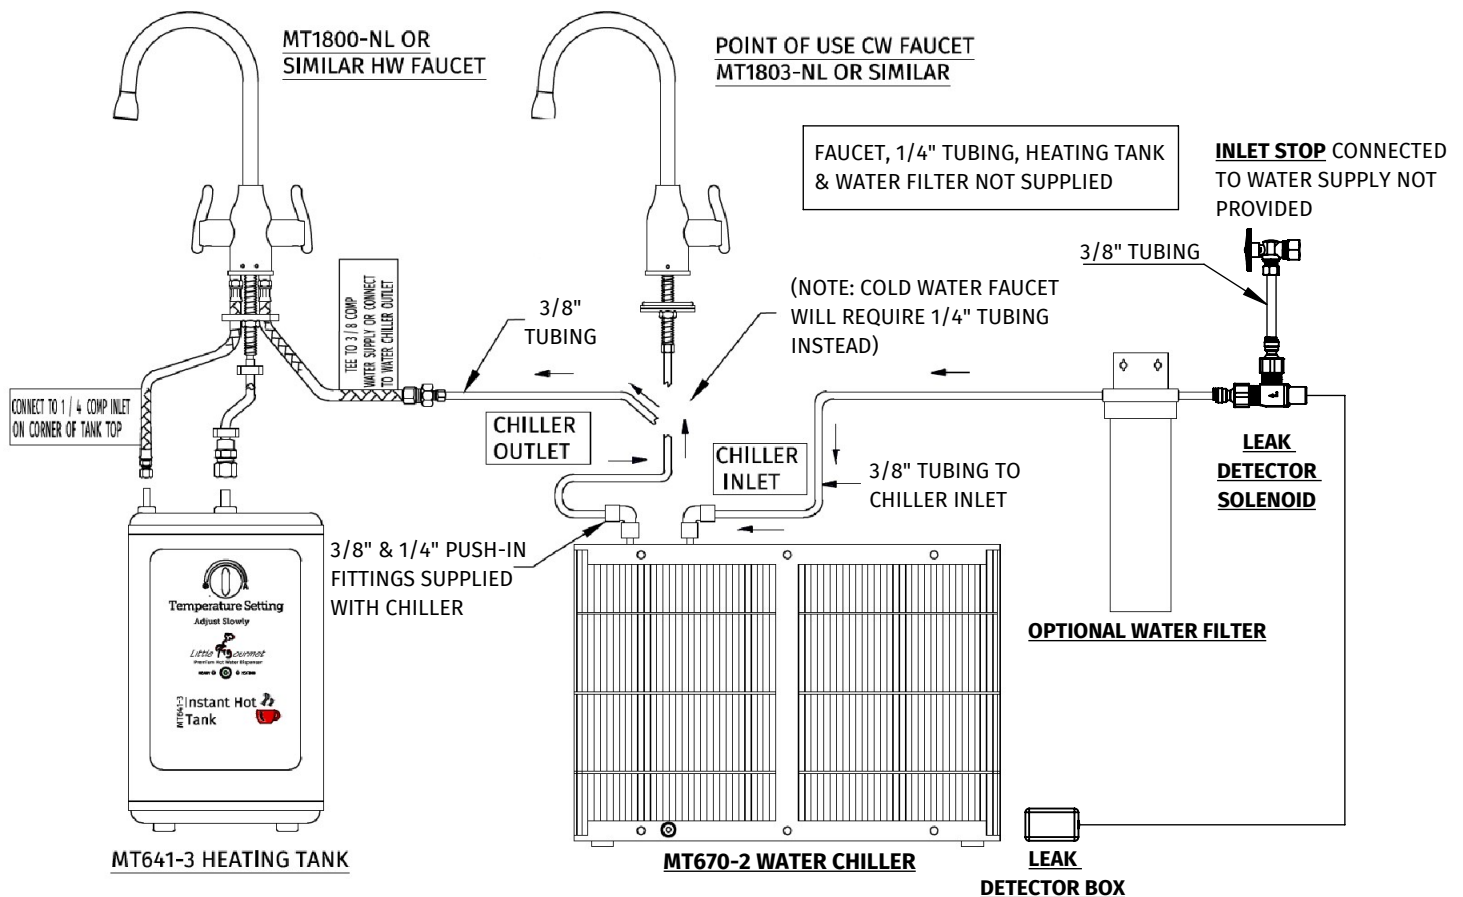

**ENSURE LEAK DETECTOR BOX IS NEXT TO CHILLER AND/OR  
HEATING TANK AND IS POSITIIONED UP TO ENSURE WATER  
DETECTION**