
<u>MT12-8</u>

MULTIFUNCTION SHOWER HEAD

SPECIFICATION SHEET





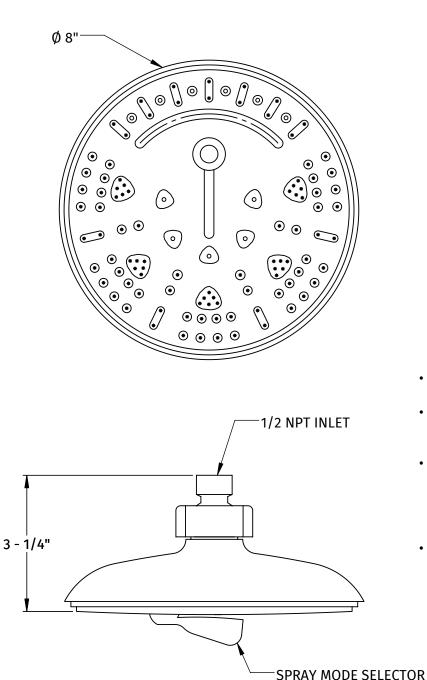

- ABS PLASTIC CONSTRUCTION
- 1/2" SWIVEL BALL JOINT FOR ANGLE ADJUSTMENT
- 1.6 GPM FLOW RATE MEETS CALIFORNIA REQUIREMENTS (OPTIONAL 2.5 GPM RESTRICTOR ALSO INCLUDED)
- SIX SPRAY OPTIONS:
 - PELLET
 - TRICKLE
 - WATERFALL
 - FULL SPRAY
 - WATER COLUMN
 - FULL SPRAY + WATER COLUMN

WARRANTY

SFIAT MODE SELECTO

FOR WARRANTY INFO PLEASE VISIT WWW.MOUNTAINPLUMBING.COM/WARRANTY-CLAIMS

FINISH CARE & MAINTENANCE

NEVER USE ANY HARSH ALKALI, ACID BASED DETERGENTS OR CLEANERS SUCH AS SOFT SCRUB®, SCRUBBING BUBBLES® OR COMET® TO CLEAN. DO NOT USE BRILLO® OR SCOTCH BRITE® PADS. THESE WILL ALL HARM THE FINISH. TO CLEAN, USE ONLY A DAMP SOFT CLOTH AND WIPE GENTLY. STANDARD WINDEX® CAN ALSO BE USED SPARINGLY. IT IS NOT NECESSARY TO WIPE HARD TO REMOVE SPOTS. TO MAINTAIN THE FINISH, WIPE WITH A SOFT DRY CLOTH AFTER USE. AN OCCASIONAL COAT OF PURE CARNAUBA WAX WITHOUT CLEANERS WILL HELP PORTECT THE FINISH.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE www.mountainplumbing.com 888-222-9140 fax 972-456-2719