



mountain chill

MT670-2 WATER CHILLER



INSTALLATION SHEET

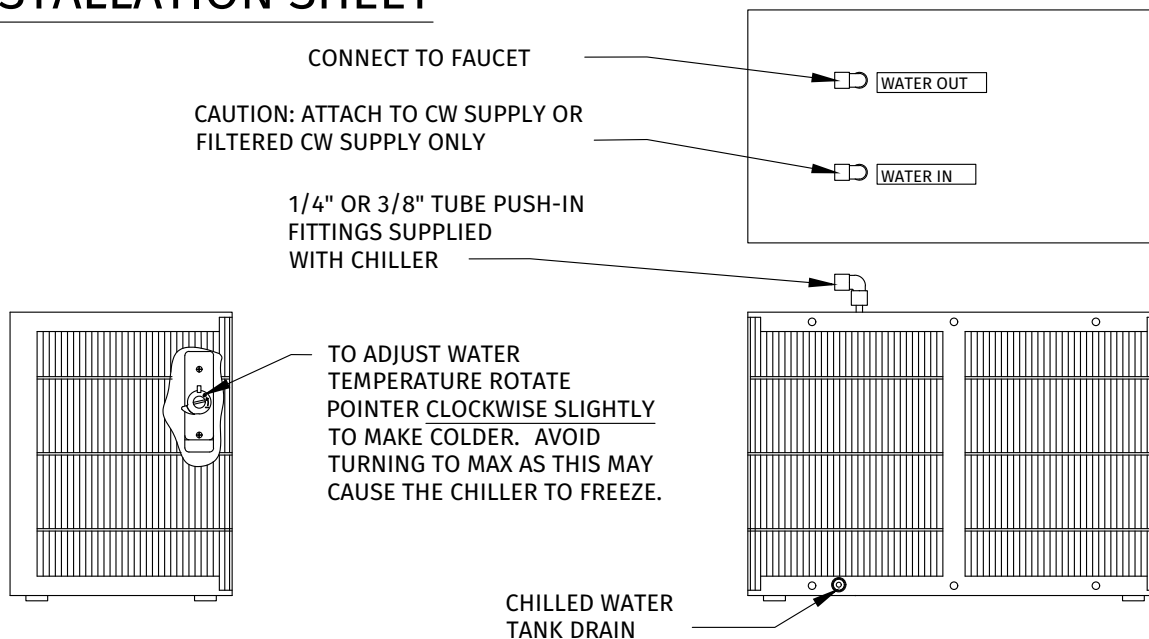


1. DO NOT INSTALL THE CHILLER OUTDOORS OR IN A LOCATION WHERE THE TEMPERATURE MAY FALL BELOW 32°F.
2. WHEN INSTALLING CHILLER IN A CABINET, MAKE SURE THERE IS A VENT FOR AIR CIRCULATION OR AN OPENING IN CABINET BACK.
3. KEEP CHILLER AT LEAST 2 INCHES AWAY FROM CABINET WALL.
4. AFTER ALL CONNECTIONS ARE COMPLETE, OPEN FAUCET TO FLUSH CHILLER, TANK, TUBING & FILTER (IF USED). CHECK FOR LEAKS.
5. PLUG IN CHILLER AND ALLOW TO RUN UNTIL IT STOPS (APPROXIMATELY 7 TO 12 MINUTES).
6. WATER IS NOW CHILLED AND READY FOR DRINKING.

MT670-2 CHILLER SPECIFICATIONS	
POWER RATING	115VAC 60HZ, 220VAC 50HZ
POWER USAGE	75W (0.2 kw.hr/24hr), 1.2A
COMPRESSOR	SINGLE PHASE
REFRIGERANT	R134A, 1.2oz CHARGE
OUTPUT TEMP RANGE	39.2° F to 50° F
TANK CAPACITY	0.5 GALLONS
OUTPUT CAPACITY	3 GALLONS/HR
DIMENSIONS	10 1/8" HI, 11 3/4" DP, 16" WIDE
CERTIFICATIONS	C-UL-US, CE, CB
WARRANTY	THREE YEARS ON COMPRESSOR

**MT550-NL OR MT650-NL
HW AND CW FAUCET**

TUBING, FAUCETS, HEATING TANK & WATER FILTER NOT SUPPLIED.
NOTE: 3/8" TUBING CAN ALSO BE USED.

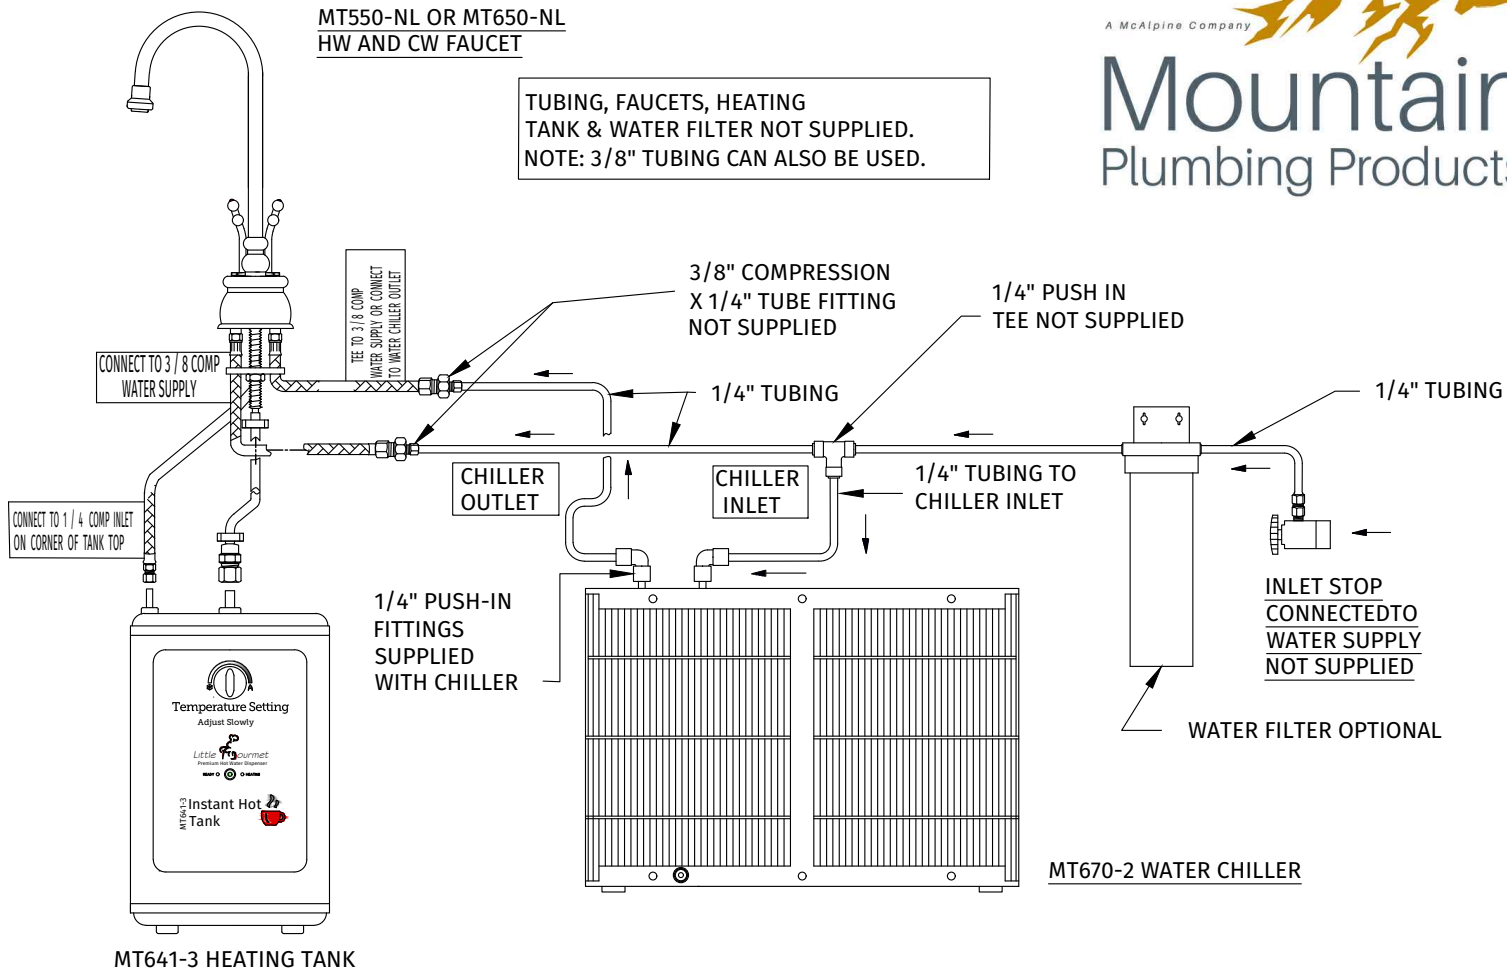


MT641-3 HEATING TANK

MT670-2 WATER CHILLER

**MT1800-NL OR
SIMILAR HW FAUCET**

**POINT OF USE CW FAUCET
MT1803-NL OR SIMILAR**

TUBING, FAUCETS, HEATING TANK & WATER FILTER NOT SUPPLIED
NOTE: 3/8" TUBING CAN ALSO BE USED

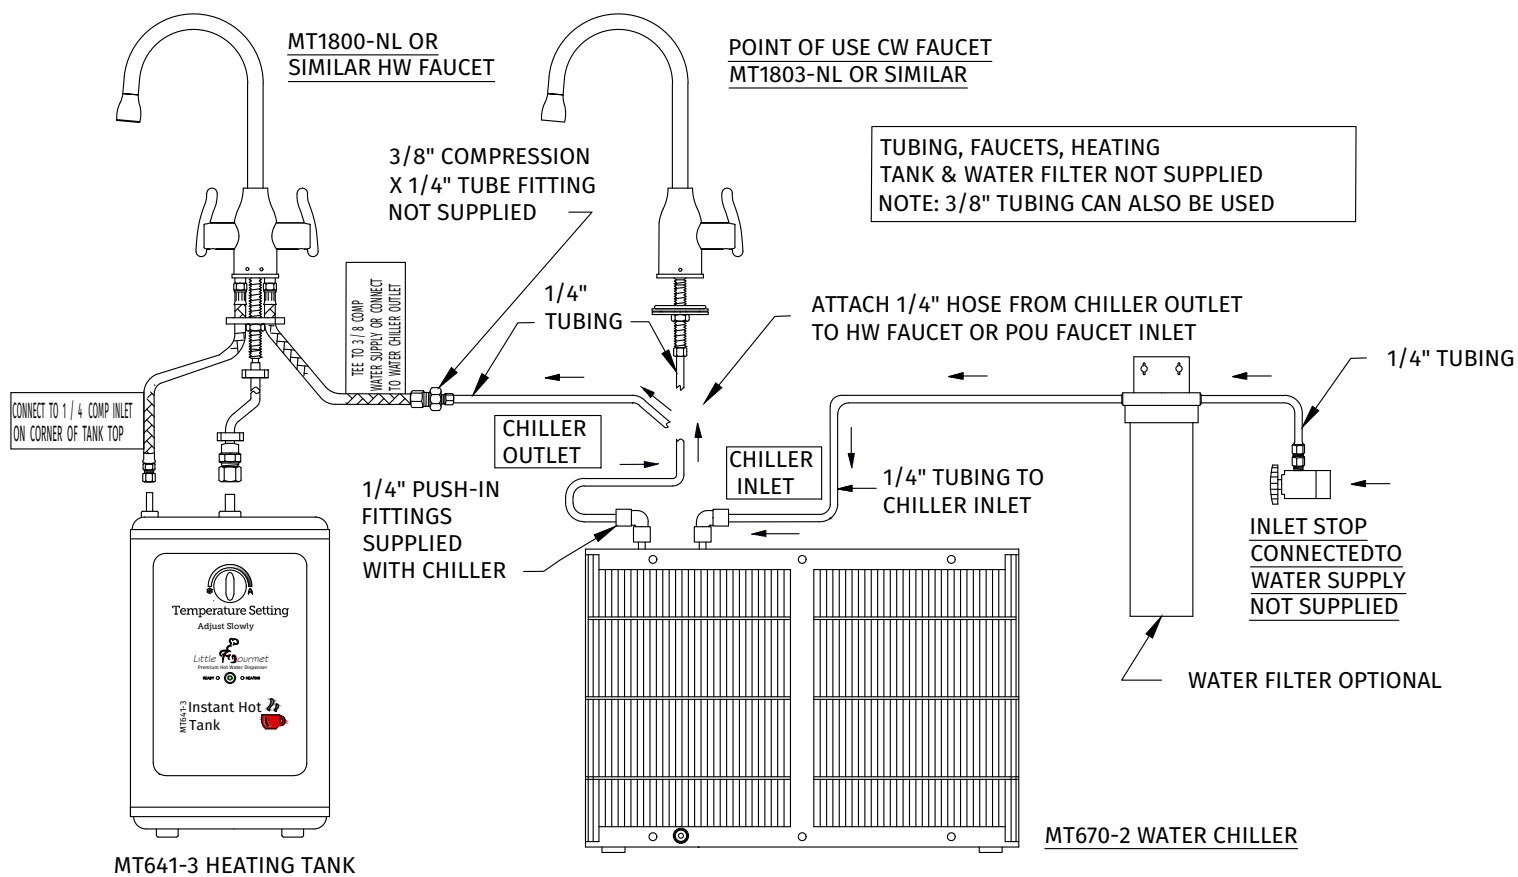

MT641-3 HEATING TANK

MT670-2 WATER CHILLER