


# MT120EV

## WASTE DISPOSER TRIM WITH STOPPER INSTALLATION INSTRUCTIONS

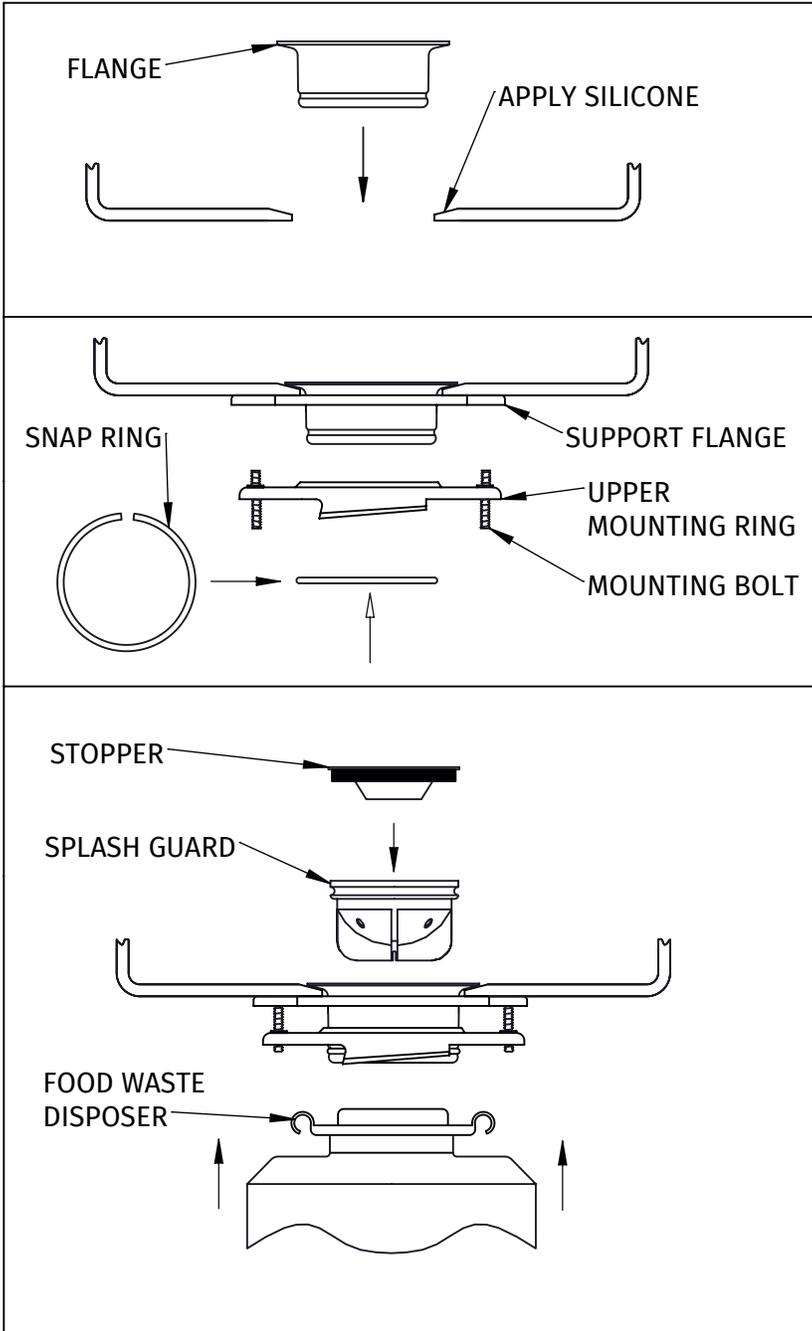

1. READ THE INSTRUCTIONS FOR THE WASTE DISPOSER FULLY BEFORE INSTALLING THIS PRODUCT. DISASSEMBLE THE 3-BOLT MOUNTING ASSEMBLY THAT CAME WITH THE DISPOSER, AND REMOVE THE SINK FLANGE. IT WILL BE REPLACED BY THE FLANGE THAT CAME WITH THIS PRODUCT.
2. REMOVE THE STRAINER BASKET AND SET ASIDE. APPLY A BEAD OF 100% SILICONE AROUND THE SINK HOLE AND PUSH FLANGE INTO THE SINK.
3. FROM UNDER THE SINK, SLIDE THE SUPPORT FLANGE & UPPER MOUNT RING WITH SCREWS UP OVER THE FLANGE.
4. STRETCH THE SNAP RING OVER THE BOTTOM OF THE FLANGE, AND MAKE SURE IT SNAPS FULLY INTO THE GROOVE.
5. TIGHTEN MOUNTING BOLTS EVENLY, MAKING SURE THAT THE FLANGE IS CENTERED IN THE SINK.
6. FROM ABOVE THE SINK, INSERT THE SPLASH GUARD AND STOPPER INTO THE FLANGE.
7. INSTALL THE FOOD WASTE DISPOSER ACCORDING TO THE MANUFACTURER'S INSTRUCTIONS.

### WARRANTY

FOR WARRANTY INFO PLEASE VISIT [WWW.MOUNTAINPLUMBING.COM/WARRANTY-CLAIMS](http://WWW.MOUNTAINPLUMBING.COM/WARRANTY-CLAIMS)

### FINISH CARE & MAINTENANCE

NEVER USE ANY HARSH ALKALI, ACID BASED DETERGENTS OR CLEANERS SUCH AS SOFT SCRUB®, SCRUBBING BUBBLES® OR COMET® TO CLEAN. DO NOT USE BRILLO® OR SCOTCH BRITE® PADS. THESE WILL ALL HARM THE FINISH. TO CLEAN, USE ONLY A DAMP SOFT CLOTH AND WIPE GENTLY. STANDARD WINDEX® CAN ALSO BE USED SPARINGLY. IT IS NOT NECESSARY TO WIPE HARD TO REMOVE SPOTS. TO MAINTAIN THE FINISH, WIPE WITH A SOFT DRY CLOTH AFTER USE. AN OCCASIONAL COAT OF PURE CARNAUBA WAX WITHOUT CLEANERS WILL HELP PROTECT THE FINISH.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE