



HYDRAONE



5 IN 1 WATER SYSTEM UNIT

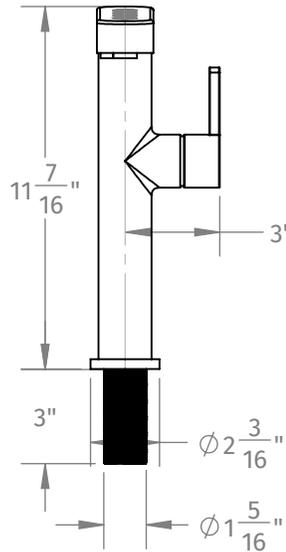

SPECIFICATION SHEET

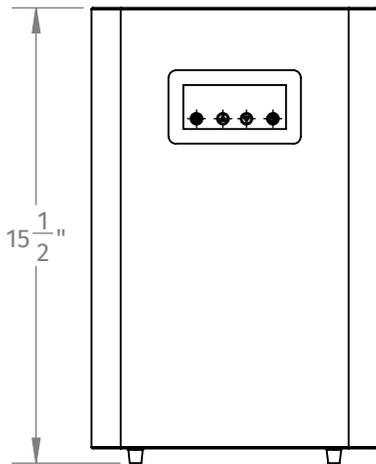

- TOUCH SCREEN INTERACTIVE CONTROL FOR AMBIENT, HOT, COLD AND SPARKING WATER
- COLD WATER DOWN TO 45°F AND HOT WATER UP TO 190°F
- SIDE HANDLE FOR HIGH-FLOW TAP WATER
- 5/8 GALLON STAINLESS STEEL HOT AND COLD TANK
- Rated Voltage: 220-240V, 50 HZ

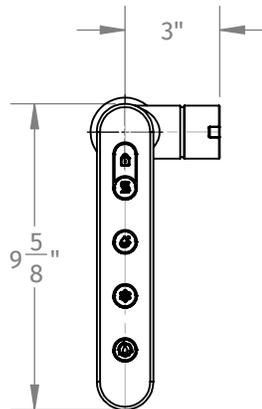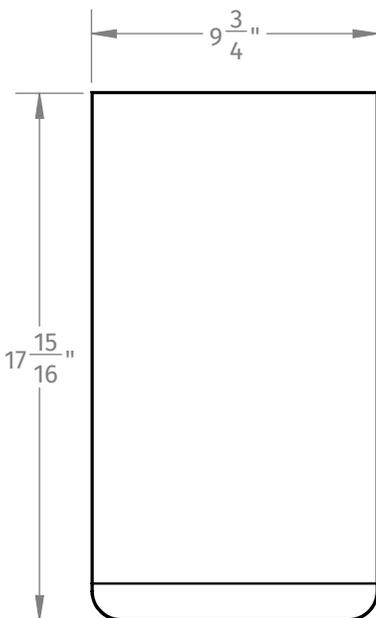

WARRANTY

FOR WARRANTY INFO PLEASE VISIT WWW.MOUNTAINPLUMBING.COM/PAGE/RESOURCES/WARRANTY

FINISH CARE & MAINTENANCE

NEVER USE ANY HARSH ALKALI, ACID BASED DETERGENTS OR CLEANERS SUCH AS SOFT SCRUB®, SCRUBBING BUBBLES® OR COMET® TO CLEAN. DO NOT USE BRILLO® OR SCOTCH BRITE® PADS. THESE WILL ALL HARM THE FINISH. TO CLEAN, USE ONLY A DAMP SOFT CLOTH AND WIPE GENTLY. STANDARD WINDEX® CAN ALSO BE USED SPARINGLY. IT IS NOT NECESSARY TO WIPE HARD TO REMOVE SPOTS. TO MAINTAIN THE FINISH, WIPE WITH A SOFT DRY CLOTH AFTER USE. AN OCCASIONAL COAT OF PURE CARNAUBA WAX WITHOUT CLEANERS WILL HELP PROTECT THE FINISH.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE