


# BDR20TF22,27

## TUB FILLER DRAIN - BRASS BODY CABLE DRAIN OPERATED WITH FLEXIBLE OVERFLOW NECK



### SPECIFICATION SHEET

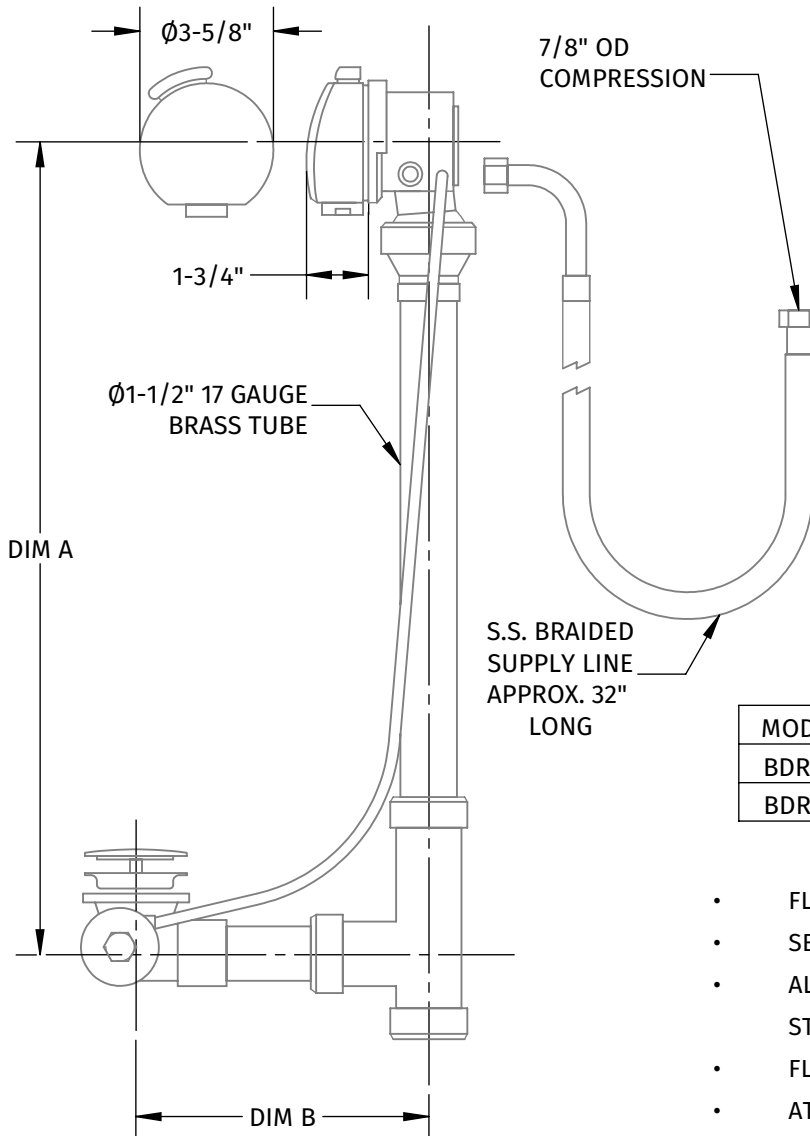

ATMOSPHERIC  
VACUUM  
BRAEKER

MODEL NO.	DIM A*	DIM B*	CABLE LENGTH
BDR20TF22	12" - 22"	7" - 12"	27"
BDR20TF27	22" - 26"	7" - 12"	39"

- FLOW RATE IS ~16GPM
- SEPARATE MIXING VALVE IS REQUIRED
- ALL HARDWARE IS PLATED BRASS OR STAINLESS STEEL
- FLEXIBLE OVERFLOW NECK
- ATMOSPHERIC VACUUM BREAKER SUPPLIED 3/4" NPT THREADS
- LEVER STYLE HANDLE CONTROLS THE CABLE OPERATED POP-UP DRAIN

#### WARRANTY

FOR WARRANTY INFO PLEASE VISIT [WWW.MOUNTAINPLUMBING.COM/PAGE/RESOURCES/WARRANTY](http://WWW.MOUNTAINPLUMBING.COM/PAGE/RESOURCES/WARRANTY)

#### FINISH CARE & MAINTENANCE

NEVER USE ANY HARSH ALKALI, ACID BASED DETERGENTS OR CLEANERS SUCH AS SOFT SCRUB®, SCRUBBING BUBBLES® OR COMET® TO CLEAN. DO NOT USE BRILLO® OR SCOTCH BRITE® PADS. THESE WILL ALL HARM THE FINISH. TO CLEAN, USE ONLY A DAMP SOFT CLOTH AND WIPE GENTLY. STANDARD WINDEX® CAN ALSO BE USED SPARINGLY. IT IS NOT NECESSARY TO WIPE HARD TO REMOVE SPOTS. TO MAINTAIN THE FINISH, WIPE WITH A SOFT DRY CLOTH AFTER USE. AN OCCASIONAL COAT OF PURE CARNAUBA WAX WITHOUT CLEANERS WILL HELP PROTECT THE FINISH.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

[www.mountainplumbing.com](http://www.mountainplumbing.com) 888-222-9140 fax 972-456-2719

form BDR20TF22,27 spec sht