

MTWHF


MOUNTAIN PURE FULL HOUSE WATER FILTER

INSTRUCTIONS



Raw Water Parameter	Condition for Operation
Bacteria	None Allowed
Chlorine	<3 ppm
Colloidal Iron	NA
Hardness	Max 25 grains (427 ppm)
Hydrocarbons, oils, or lubricants	None Allowed
Hydrogen Sulfide	None Allowed
Iron & Manganese (Clear Only)	<6 ppm Combined
Iron & Manganese (Colored)	<0.3 ppm
Iron Bacteria	None Allowed
Organic Iron	None Allowed
pH	>6.0 and <8.5
Sediment	>5 micron
Silica	<100 ppm
Tannin / Organics	None Allowed
Turbidity	<1 NTU

Parameters of Raw Water for Filter to Run as Intended

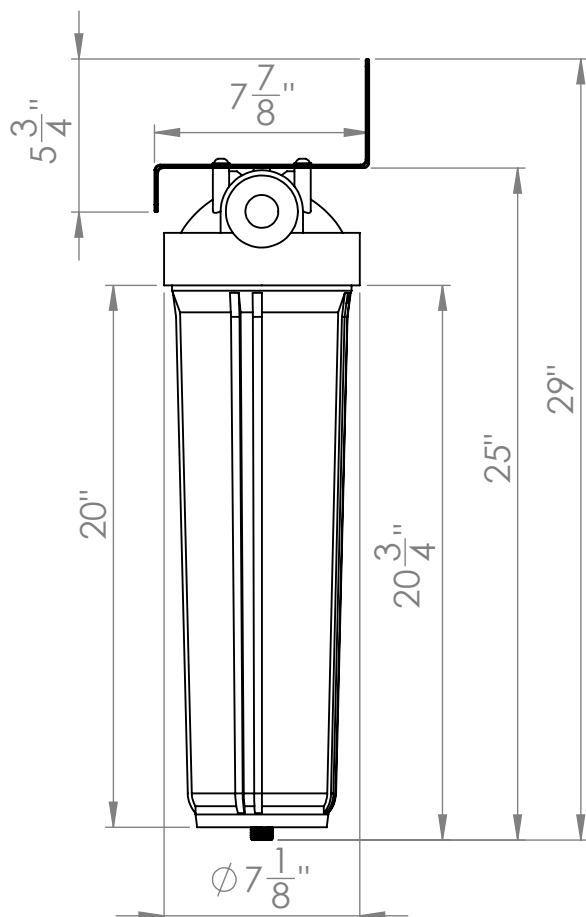

WARNING:

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after unit.

Details :

- Max Pressure -120 psi
- Max Capacity -12 Months
- Max Flow - 15gpm
- Dry Weight - 18 Pounds
- Min-Max Temperature : 39.2°F-113°F
- Removes Sediment Down to 20 microns

Removes Down to 5 microns if Used With Pre-Filter[MTWHF-PRE]

WARRANTY

FOR WARRANTY INFO PLEASE VISIT WWW.MOUNTAINPLUMBING.COM/WARRANTY-CLAIMS

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

www.mountainplumbing.com 972-456-3273 fax 972-456-2719

7/15/2025

AutoRecover Of MTWHF Spec Sh